ORBITAL SANDER



- 1.Low vibration will not make you tired even long hour operation
- 2. Compact and light weight design enables to operate with one hand.



- 1. For paint removing.
- 2. For rough sanding for whole painting.
- 3. Suitable all kinds of sanding applications.



■Orbital Sander SAM-41S ■Orbital Sander SAM-41

Pad Size	L:4-3/8" W:3"	L : 110.0mm W : 75.0mm
Orbital Diameter	1/8"	3.0 mm
Free Speed	10,000 r.p.m.	
Overall Length (with pad)	6-15/16 in.	176.0 mm
Height (with pad)	3-3/16 in.	80.0 mm
Weight (with pad)	1.5 lbs.	0.7 kg
Air Consumption (normal)	7.1 c.f.m.	0.20 m ³ /min
Hose Size	1/4 in.	6.5 mm

 $\label{eq:performance} \& \textit{Performance figures are at 0.62MPa(Pe)(90P.S.I.)} air \textit{pressure.}$




Non Suction Type

	Pad Size	L:4-3/8" W:3"	L : 110.0mm W : 75.0mm
	Orbital Diameter	1/8"	3.0 mm
	Free Speed	10,000 r.p.m.	
	Overall Length (with pad)	6-1/16 in.	153.0 mm
	Height (with pad)	3-3/16 in.	80.0 mm
	Weight (with pad)	1.5 lbs.	0.7 kg
	Air Consumption (normal)	7.1 c.f.m.	0.20 m³/min
	Hose Size	1/4 in.	6.5 mm

**Performance figures are at 0.62MPa(Pe)(90P.S.I.)air pressure.

SAT-7S

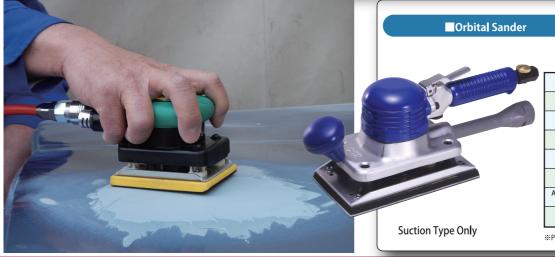

L: 7-1/8" W: 3-15/16"	L: 180.0mm W: 100.0mm
1/4"	7.0 mm
7,000 r.p.m.	
12-1/4 in.	310.0 mm
4-11/16 in.	119.0 mm
4.8 lbs.	2.2 kg
15.9 c.f.m.	0.45 m ³ /min
1/4 in.	6.5 mm
	W: 3-15/16" 1/4" 7,000 12-1/4 in. 4-11/16 in. 4.8 lbs. 15.9 c.f.m.

**Performance figures are at 0.62MPa(Pe)(90P.S.I.)air pressure.